



## Shower Tray Collection Slab

Customisable Shower Tray in white cultured marble.

Dimensions of the top, position of the waste and thickness can be changed.



## Description

A seamless flat, walk-in shower tray in Cultured Marble that can be installed flush or on top of the floor.

Available with standard or channel waste, and in an anti-slip finish.


Slab shower tray comes in a solid Cotton White, and textured Evening Shadow (Light Grey), Slate Grey (Mid-Grey), Natural and Pigeon.

## External Dimension Ranges

- Slab 900: 900l x 900w
- Slab 1000: 1000l x 1000w
- Slab 1100: 1100l x 900w
- Slab 1200: 1200l x 900w
- Slab 1500: 1500l x 900w
- Slab 1800: 1800l x 1000w
- Slab 2000: 2000l x 1000w
- Slab 2200: 2200l x 1000w
- Slab 2500: 2500l x 1000w

Thickness 25mm

## Finishes




Cotton White



Evening Shadow



Slate Grey



Natural



Pigeon



Slab Shower Tray Views:



Front View



Side View



Plan View




Angled View




Slab Shower Tray Units of varying sizes, customisable up to 3000mm in length and width.


(3D line drawings)




A




B

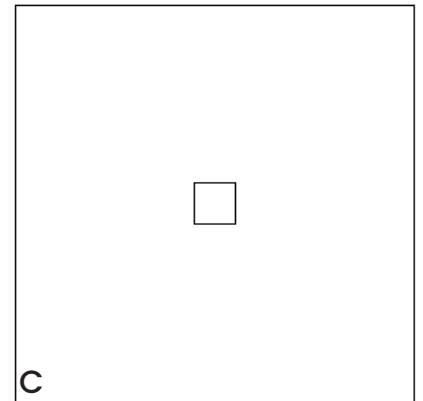

C



D



E

- A Slimline Shower Tray 900x900
- B Slimline Shower Tray 900x1100
- C Slimline Shower Tray 1000x1000
- D Slimline Shower Tray 1200x900
- E Slimline Shower Tray 1500x900



## Material & Care Tips

Marblecast vanity basins and shower trays are made from a mixture of crushed marble and resin.

We use a ratio of 80% marble and 20% resin.

The material is mixed together and a small amount of catalyst is added.

The catalyst reacts with the resin and ensures that the resin polymerizes and hardens into a hard, strong mass.

This mass is then moulded into highly durable bathroom ware.

The product has been polished to a high gloss.

Clean with a soft cloth or sponge using soap or mild detergent and warm water.

The use of abrasive pads or chemical abrasives will dull the product over time.

The thermostat in the hot water cylinder should be set at 60-65 degrees Celsius.

It is recommended to first run cold water into the bowl with a plug followed by the hot water.

This will allow the marble to warm up slowly and ensure the longevity and attractiveness of the product.

